

KSL SERIES

SOUNDING BOB TYPE LEVEL INDICATOR

Measuring Level Correctly & Reliably !!
Ultimate Solution for Stock Management



The housing is so robust that the unit's durability under
harsh conditions may be incomparable.
It can be applied to every process !!

KSL SERIES

SOUNDING BOB TYPE LEVEL INDICATOR

Ultimate Solution for Stock Management Reliably Catching Level for Powder, Granules & Lumps

This is the general-purpose level meter having a good market share as a level meter for powder, granules and lumps stored in a tank, a silo or the like. It can be used for versatile purposes as a level meter for all sorts of powder, granules, and lumps.

■ PRINCIPLE OF OPERATION

- 1 When a start signal is input, the motor starts up and then the metering tape comes out, followed by the weight descending.
- 2 The motor stops when the weight touches on the measuring substance, and level measurements are output
- 3 When the motor reversely rotates to get the weight back to the roll-up-complete position, it stops.
- 4 The unit stands by awaiting the next start signal

Just push a measuring button on any tanks, and, with only this touch, you can select the tank to measure and start measuring !!




KSL-DS4

KSL-DS8



KSL-T8

CPU Built-in

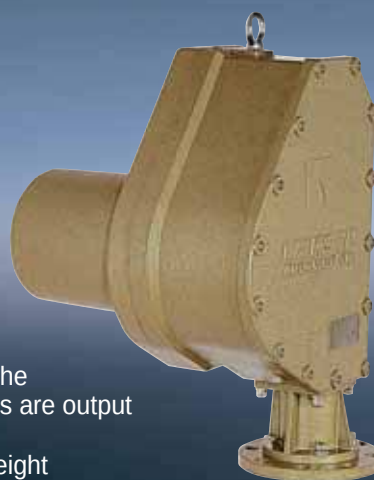

KSL-GT

Withstand-pressure
Explosion-proof
Exd BT4



KSL-MT
CPU Built-in



KSL-W2B
Standard




KSL-T2
Standard




KSL-W3T
Standard



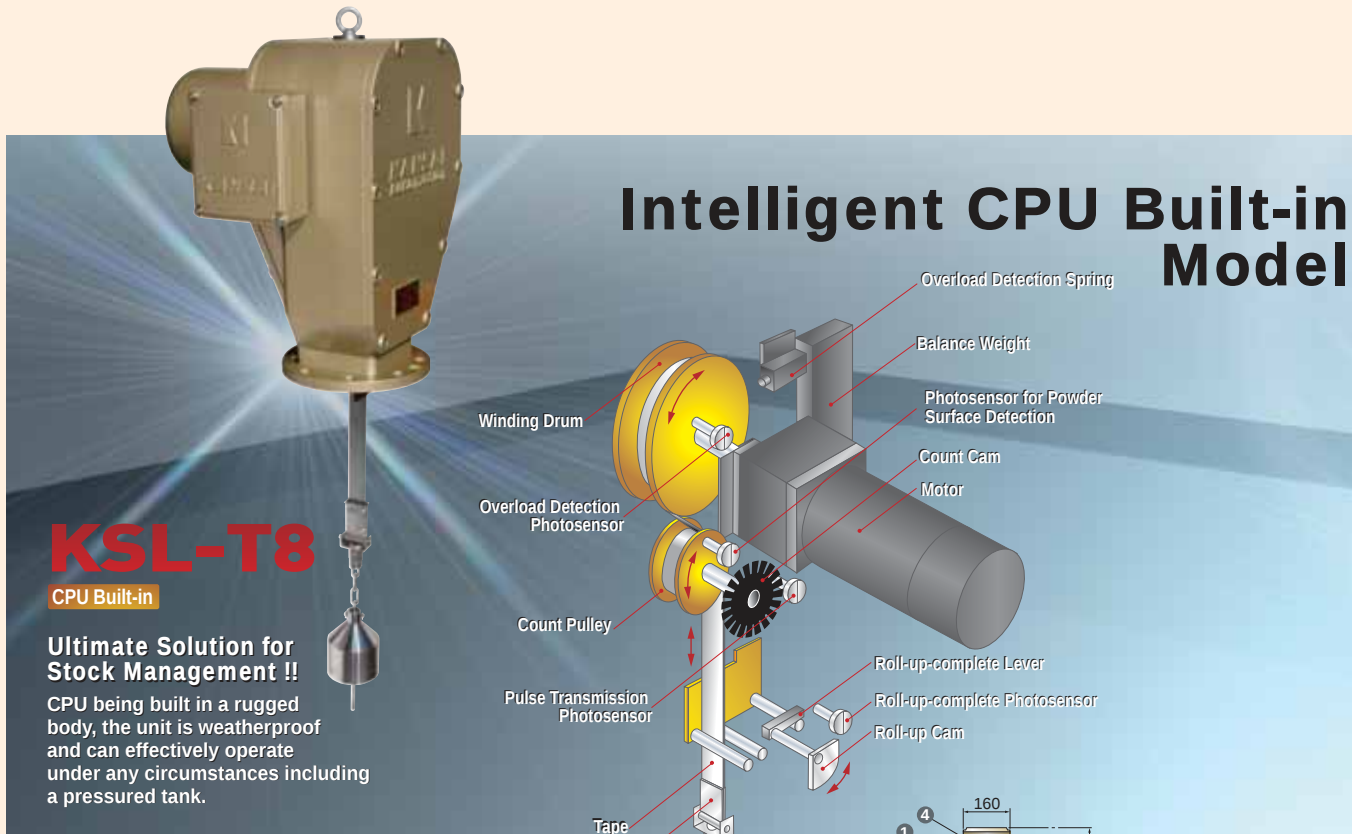


Example of Equipment Configuration

Transmitted pulses may be indicated directly on an Electromagnetic counter or on an electronic counter via Control Unit, or may be displayed as analog outputs via P/I Converter from Control Unit.

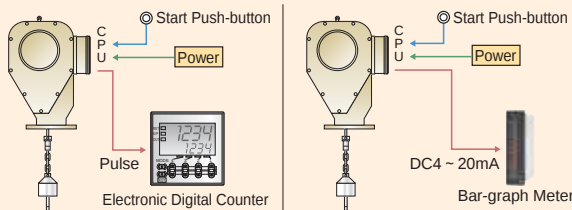


- 1 Main Frame AC
- 2 Motor Cover AC
- 3 Drum Cover AC
- 4 Control Board AC
- 5 Terminal Box
- 6 Mounting Flange SS400
- 7 Weight SUS304
- 8 Chain Rotation Axis SUS304
- 9 Tape Stopper SUS304
- Conduit Connection 2-G 1/2

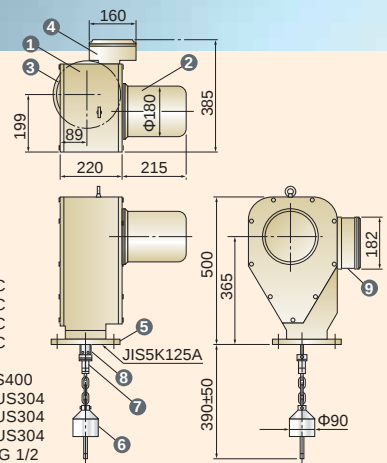

Standard Specification

- Power Voltage : 100VAC or 200VAC, Single-phase 50/60Hz
- Consumption : Max. 150VA
- Allowable Temperature : ambient - 10°C ~ + 50°C (No freezing /condensation)
Inside tank - 10°C ~ + 80°C (No freezing/ condensation)
- Measuring Span : Standard 20m (Max. 40m Option)
- Measuring Method : Pulse Counting
- Measuring Unit : 1 pulse/10cm, or 1 pulse/1cm
- Measuring Accuracy : ±10cm / ±1cm
- Motor : Single-phase, Reversible, Output 40W
30 minutes rating, with brake
- Elevating Speed : 8.8m/min(50Hz), 11.0m/min(60Hz),
- Measure : SUS304, CSP tape W32 x Thick 0.3mm
- Cutoff Load : 9kN
- Output Signal : Current signal DC4 ~ 20mA (indicate remains).
DC20 ~ 4mA(indicate vacated portion) — User can set up either one
- Pulse contact signal 1 pulse / 1cm — User can set up either one
(No-volt signal) 1pulse / 10cm
- Built-in Timer : Measuring stand-by time can be adjusted via a set-up..
- Output Contact : Reset Contact / for Remote Indication Counter, ON at the time of reset
Failure Alarm Contact/ Flickers when the measuring tape is cut off.
The contact is closed when the weight is buried.
- Body material : Aluminum casting
- Mounting Method : JIS 5K 125A
- Protection Rank : IP67
- Weight : 45kg

Circuit Board Layout / Interconnecting Diagram

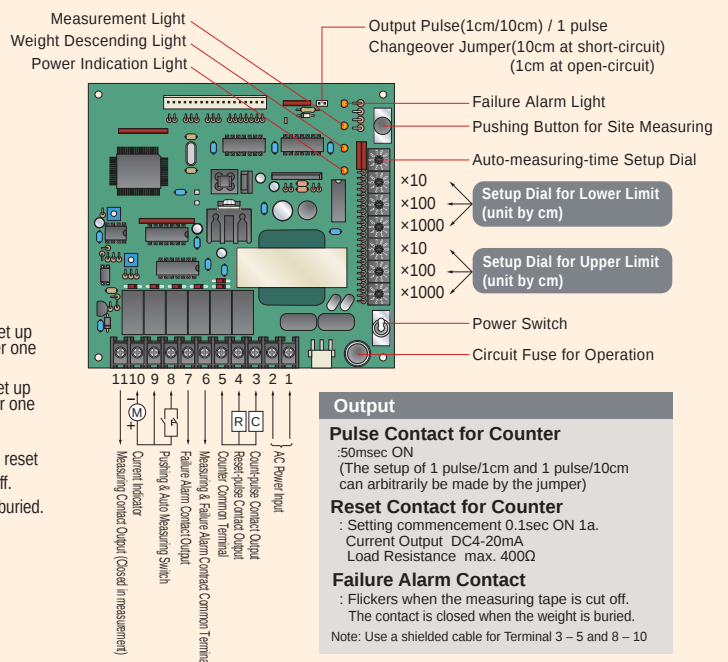

Output

Pulse Contact for Counter

:50msec ON
(The setup of 1 pulse/1cm and 1 pulse/10cm can arbitrarily be made by the jumper)

Reset Contact for Counter

: Setting commencement 0.1sec ON 1a.
Current Output DC4-20mA
Load Resistance max. 400Ω

Failure Alarm Contact

: Flickers when the measuring tape is cut off.
The contact is closed when the weight is buried.

Note: Use a shielded cable for Terminal 3 - 5 and 8 - 10

The level indications are directed from the remote. That requires no site measurement, and you can expect much improvement in terms of the working and safety environment.




KSL-MT

CPU Built-in

CPU Built-in Model of Compact Size

Suitable for level control of Hopper Bin or the like in smaller capacity

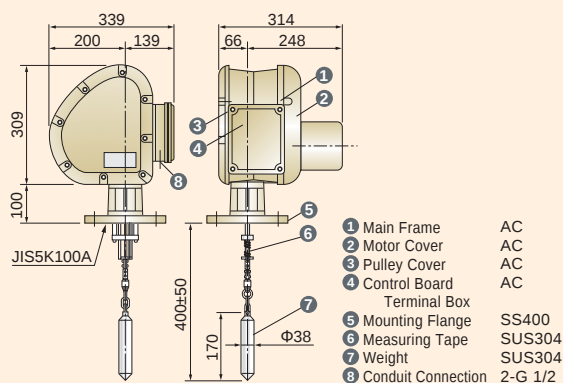

■ Standard Specification

Power Voltage : 100VAC or 200VAC, Single-phase 50/60Hz
Consumption : Max. 90VA
Allowable Temperature : -10°C ~ +50°C (No freezing / no condensation)
Measuring Span : 0 ~ 20m
Measuring Method : Pulse Counting
Measuring Unit : 1 pulse/10cm or 1 pulse/1cm
Measuring Accuracy : ±10cm / ±1cm
Motor : Single-phase, Reversible, Output 25W
30 minutes rating, with brake
Elevating Speed : 7.2m/min (50Hz), 8.5m/min (60Hz),
Measure : SUS304, CSP tape W10 x Thick 0.2mm
Cutoff Load : 1kN
Output Signal : Current signal DC4 ~ 20mA (indicate remains):
DC20 ~ 4mA(indicate vacated portion) — User can set up either one
Pulse contact signal 1 pulse / 1cm — User can set up either one
(No-volt signal) 1pulse / 10cm
Built-in Timer : Measuring standby time can be adjusted by a set-up.
Output Contact : Reset Contact / for Remote Indication Counter, ON at the time of reset
Failure Alarm Contact/ Flickers when the measuring tape is cut off.
The contact is closed when the weight is buried.
Body material : Aluminum casting
Mounting Method : JIS 5K 100A
Protection Rank : IP67
Weight : 20kg

Rugged Withstand-pressure Explosion-proof For Explosive Environment


KSL-GT

Withstand-pressure
Explosion-proof
Exd BT4



It can reliably operate regardless of particulates, temperature changes, and electric fluctuation of measuring substances.

It can measure explosive substances as well as effectively function in the explosive gas environments such as chemical/medical factories, power station or the like.

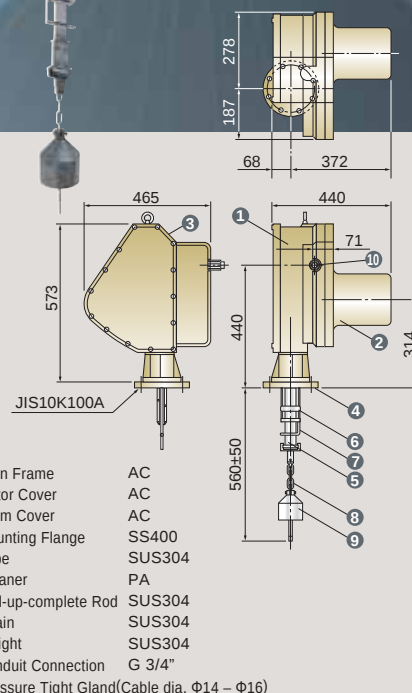

■ Standard Specification


Power Voltage : 100VAC or 200VAC, Single-phase 50/60Hz
Consumption : 150VA
Allowable Temperature : ambient -10°C ~ +40°C (No freezing / condensation)
inside tank -10°C ~ +40°C (No freezing / condensation)
Measuring Span : 0 ~ 20m (Max. 30m Option)
Measuring Method : Pulse Counting
Measuring Unit : 1 pulse/10cm
Measuring Accuracy : ±10cm
Motor : Single-phase Output 40W, Class E Insulating
33% ED twice/hour (condenser 15μF)
Single-phase 200VAC 40W Class E Insulating
33% ED twice/hour (condenser 3.5μF)
Elevating Speed : 8.8m/min(50Hz), 11.0m/min(60Hz),
Measure : SUS304 - CSP tape W32 x Thick 0.3mm
Cutoff Load : 9kN
Body material : Aluminum casting
Mounting Method : JIS 10K 100A
Protection Rank : Indoor (Provide with raintight cover for outdoor use)
Weight : 75kg

KSL-T2

Standard

This is the general-purpose level meter having a good market share as a level meter for powder & granules.

Stainless tape being adopted as a metering device, it can be used for versatile purposes as a level meter for all sorts of powder & granules.

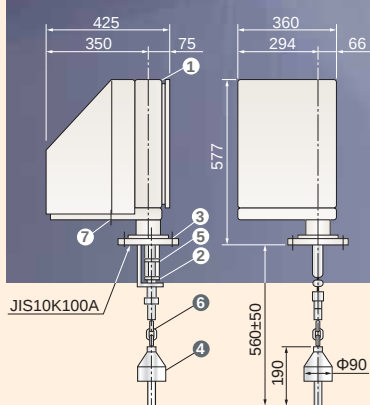

- | | |
|----------------------|------------|
| 1 Main Frame | SPCC |
| 2 Measuring Tape | 304SS |
| 3 Mounting Flange | SS400 |
| 4 Weight | 304SS |
| 5 Cleaner | Polyacetal |
| 6 Chain | 304SS |
| 7 Conduit Connection | Φ27 |

JIS10K100A


VERSATILE MODEL HAVING CUSTOMERS' CONFIDENCE AND A GOOD MARKET SHARE

A Model of Medium size, suitable for Pressured Tank, Silo or the like.

Housed in aluminum casting, it is so occlusive that it may be dustproof, pressure-proof and weatherproof.

KSL-W3T

Standard

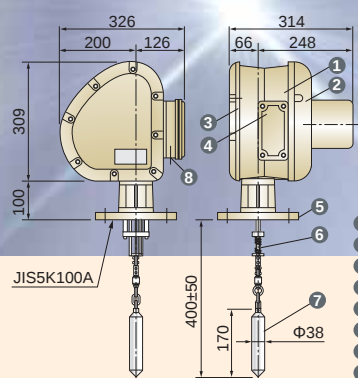

- | | |
|----------------------|-------|
| 1 Main Frame | AC |
| 2 Motor Cover | AC |
| 3 Pulley Cover | AC |
| 4 Terminal Box | AC |
| 5 Mounting Flange | SS400 |
| 6 Measuring Tape | 304SS |
| 7 Weight | 304SS |
| 8 Conduit Connection | G 3/4 |

JIS5K100A

Standard Specification



Power Voltage : 100VAC or 200VAC 50/60Hz
 Consumption : 150VA
 Allowable Temperature : ambient -10°C to +50°C (No freezing / condensation)
 inside tank -10°C to +80°C (No freezing / condensation)
 Measuring Span : 0 - 20m (Max. 40m Option)
 Measuring Method : Pulse Counting
 Measuring Unit : 1 pulse/10cm
 Measuring Accuracy : ±10cm
 Motor : Single-phase, Reversible, Output 40W
 30 minutes rating, with brake
 Elevating Speed : 9.3m/min (50Hz), 11.0m/min (60Hz),
 Measure : Tape / 304SS W32 x Thick 0.3mm
 Cutoff Load : 9kN
 Body material : SPCC
 Mounting Method : JIS 10K 100A
 Protection Rank : IP33 or equivalent
 Weight : 53kg

Standard Specification

Power Voltage : 100VAC or 200VAC 50/60Hz
 Consumption : 90VA
 Allowable Temperature : ambient -10°C to +50°C (No freezing / condensation)
 inside tank -10°C to +80°C (No freezing / condensation)
 Measuring Span : 0 - 20m
 Measuring Method : Pulse Counting
 Measuring Unit : 1 pulse/10cm
 Measuring Accuracy : ±10cm
 Motor : Single-phase, Reversible, Output 25W
 30 minutes rating, with brake
 Elevating Speed : 7.2m/min (50Hz), 8.5m/min (60Hz),
 Measure : 304SS - CSP tape W10 x Thick 0.2mm
 Cutoff Load : 1kN
 Body material : Aluminum Casting
 Mounting Method : JIS 5K 100A
 Protection Rank : IP67


Example of Equipment Configuration

Transmitted pulses may be indicated directly on an electromagnetic counter or on an electronic counter via Control Unit, or may be displayed as analog outputs via P/I Converter from Control Unit.

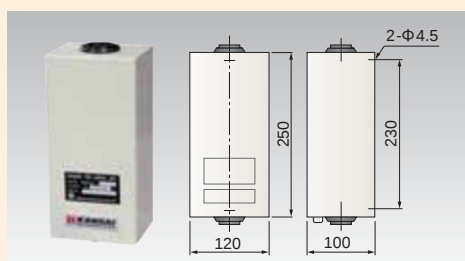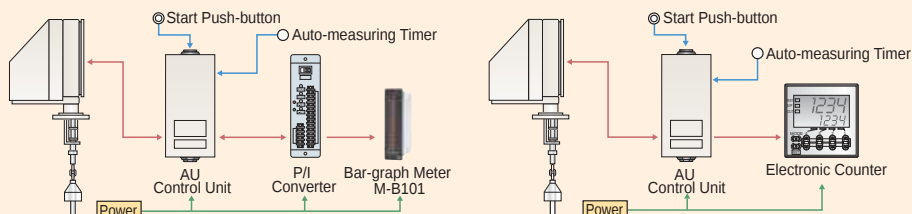

Control Unit (KSLAU)

Supply Voltage : 100 / 110AC, 200 / 220V
 50/60Hz as specified (same voltage as detector)
 Output Contact Capacity : Rated load 250VAC 5A 30VDC 5A (resistance load)
 Minimum Applicable Resistance Load 5VDC 10mA
 Allowable Ambient Temperature : 0°C to +50°C
 Color : Munsell 5Y 7/1
 Housing Material : Steel Plate
 Weight : 1.7kg




Compact model used for a hopper bin in smaller capacity.

This is a convenient type to be used for a less capacious storage tank which is placed in light-industry processing facilities including flour, feeding stuff, plastic and so on.

KSL-W2B

Standard

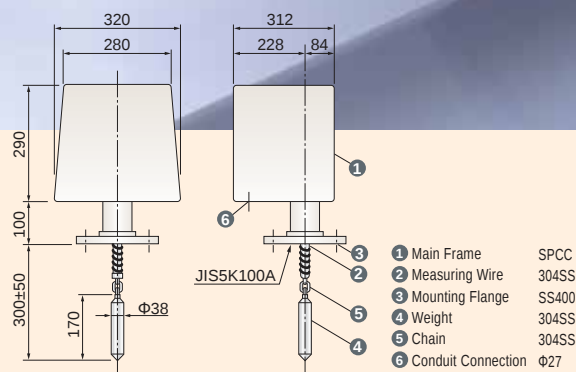

Standard Specification

Power Voltage : 100VAC or 200VAC 50/60Hz
 Consumption : 70VA
 Allowable Temperature : ambient -10°C to +50°C (No freezing / condensation)
 inside tank -10°C to +80°C (No freezing / condensation)
 Measuring Span : 0 – 20m
 Measuring Method : Pulse Counting
 Measuring Unit : 1 pulse/10cm
 Measuring Accuracy : ±10cm
 Motor : Single-phase, Reversible, Output 15W
 30 minutes rating, with brake
 Elevating Speed : 7.0m/min (50Hz), 8.6m/min (60Hz),
 Measure : 304SS Wire Φ1.5mm 7 x 19 Z-Stranding
 Cutoff Load : 1.7kN
 Body material : SPCC
 Mounting Method : JIS 5K 100A
 Protection Rank : IP33 or equivalent
 Weight : 20kg

Installed Equipment

● P/I Converter (PSC-222)

Supply Voltage : 100/200VAC ±10% 50/60Hz
 Consumption : 4VA
 Level Output : 4 – 20mADC Allowable load resistance 1kΩ
 Output Contact Capacity : Rated load 250VAC 3A 30VDC 3A (Resistance load)
 *Contact output of Upper/Lower limit Minimum Applicable Load 1VDC 10mA
 Allowable Ambient Temperature : 0°C to +50°C
 Painted Color : Munsell N7
 Housing Material : Steel Plate
 Setting Range : 0-99.9m

Microprocessor-Control CONTROLLER

- Selecting a Tank with One-touch Operation
- Discretionary Detection by Application
- Intelligent Diagnosis, Equipped with Memory Function

System Outline



The descent distance of measuring tape/wire may be converted to the stock volume in a tank.

The detector detects in a mechanical manner.


The measuring findings can be shown by height(m), %, ton & m3. You can select an indication of either Remains or Vacated Portion.

Applicable Models

KSL-T8(AUType), KSL-T2, KSL-W3T, KSL-W2B

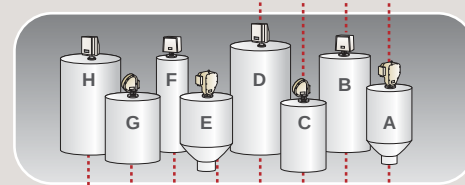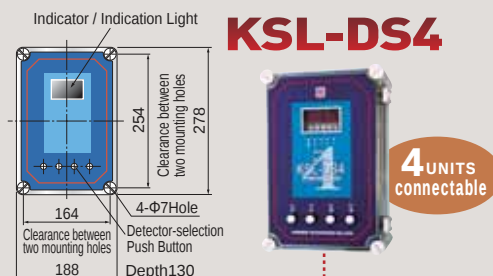

8 UNITS connectable

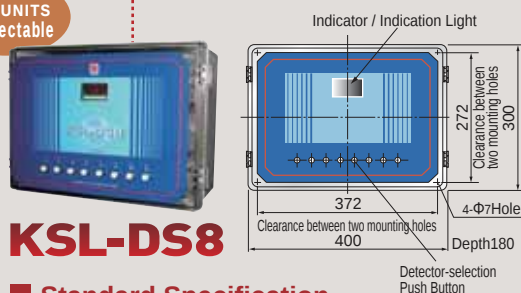


Standard Specification


Housing Type : Indoor Wall-mounted Type DS4
 W188 x H278 x D130mm
 DS8 W400 x H300 x D180mm
 Allowable Temperature : 0 to +50°C
 Power : 100VAC or 200VAC±10% 50/60Hz
 Configured Detector : Select from KSL-W2B, W3T, T2, T8 (AU model) and so on.
 Number of Connected Detectors : DS4 / 4 units, DS8 / 8 units
 Cable Type : Regular Control Cable (No extension limit)
 Number of Cable Cores : W2B : 6 cores
 W3T, T2, T8 (AU model) : 7 cores
 Measuring Range : 0 – 20m (T2, T8(AU model) Option Max.40m)
 *Varied by a selected detector
 Indicator : 7-segment LED (W8 x H14.2mm)
 Level Indication : Height (m), Specific Volume Bulk (%), Conversion (m³, ton) – No unit indicated
 Indication Format : Set up to indicate either vacated portion or remains.
 Indicated Conversion Values : Discretionary (in the range of 0 to 999)
 Memory Function : EEPROM, Set Values or Values formerly measured
 Diagnostic Function : Burial Alarm, Measure Cut-off Alarm depend on Selected Detector
 External Output : Not available

**KSL-T8
KSL-GT
KSL-T2**
Various Types
of Weight


Standard Weight
SUS304



Opened/Float-type Weight
SUS304
(Low Specific Gravity)




Chain-type Weight
SS400 or
SUS304
(for lumps)




**KSL-MT
KSL-W2B
KSL-W3T**
Various Types
of Weight


Standard Weight
SUS304




Umbrella-type Weight
SUS304
(Low Specific Gravity)



Disc-shaped Weight
SUS304
(Low Specific Gravity)



Please advise the following information for your inquiries and ordering.

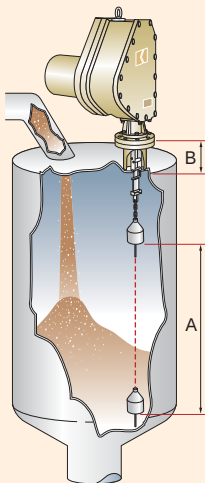

1. Name of Measuring Substance	[	]
2. Specific Gravity of the Substance	[	]
3. Granularity of the Substance	[	]
4. Granularity of the Substance	[	]
5. Temperature in a Tank	[	°C
6. Pressure in a Tank	[	Pa
7. Ambient Temperature	[	°C
8. Power Voltage	[	]
A. Measuring Range	[	]
B. Nozzle Height	[	]

Installed Equipment

● **Meter Relay LV1000-AI-A2**



Power supply: AC85 to 264V (50/60Hz)
DC12 to 24V ±10%
Power consumption: Max 22VA (Option 10W)
Sensor supply voltage: DC24V (150mA)
Analog Current Output: DC4 to 20mA
(Resistance load Max.500Ω)
Analog Current Input: DC4 to 20mA
(Input resistance 250Ω)
Contact capacity: AC250V 0.3A
(Resistance load)
DC30V 2A
(Resistance load) Max 60w
Linearization function: 20 points
Alarm contact output: 2c

● **Electronic Digital Counter (H7CX-A114)**



Size : DIN48 x 48mm
Power Voltage : 100 – 240VAC
50/60Hz (common)
Consumption : about 9.2VA
Display : 7 segment, Negative
Transmissive LCD in 4 digit)
Input : Contact / Open the contact or
short circuit.
Features : Select either addition or subtraction.
A counter that can operate the control
output when a set number is counted

Line of business

- Rotary Paddle Type Level Switch
- Vibration Type Level Switch
- Swing Type Level Switch
- Acoustic Level Switch
- Capacitance Type Level Switch
- Capacitive Proximity Sensor
- Capacitance Type Level Indicator
- Diaphragm Type Level Switch
- Tilt Switch
- Leak Type Level Switch
- Microwave Switch
- Sounding Bob Type Level Indicator
- Flow Switch
- Conductance Type Level Switch
- Float Switch
- Float Type Level Indicator
- Ultrasonic Type Level Indicator
- Equipments For Conveyor Lines
- Dust Monitor System
- Zirconia Oxygen Analyzer
- Laser Type Level Indicator
- RADAR Type Level Indicator
- On-line Sensors for Accurate Liquid Analysis
- Ultrasonic Flow meter

*Please be sure to read USER'S GUIDE, Installation & Operation Instructions before using the instrument.

*The specifications herein may be subject to change without advance notice.

All-round Manufacturer of Level Controllers for Powder, Granules and Liquid

KANSAI Automation Co.,Ltd.

Headquarters :

2-14, Togano-cho, Kita-ku, Osaka 530-0056, Japan
TEL. 81-6-6312-2071 FAX. 81-6-6314-0848
e-mail: info@kansai-automation.co.jp

<http://www.kansai-automation.co.jp>

Tokyo Branch : 1-29-6, Hamamatsu-cho, Minato-ku. Tokyo 105-0013, Japan
TEL. 81-3-5777-6931 FAX. 81-3-5777-6933

Nagoya Office : 3-31-27, Uchiyama, Chigusa-ku, Nagoya 464-0075, Japan
TEL. 81-52-741-2432 FAX. 81-52-741-1588

Kyushu Office : 1-2-39, Asano, Kokura Kita-ku, Kitakyushu 802-0001, Japan
TEL. 81-93-511-4741 FAX. 81-93-511-4580



Agent



NIHO ENGINEERING SEA SDN. BHD.

CONSULTANCY & TRAINING 202101000847 (1401145-K)

No. 72, Jalan Keluli AN7/AN
Pusat Perniagaan Bukit Raja, Seksyen 7
40000 Shah Alam, Selangor
P: +6012-322 1566 W: <https://www.nihon-e.com>
E: engineering@nihon-e.com

